



ES



EN

MORDAZA DE SENOS 32D SINUS MACHINE VICE 32D

Características / Characteristics


Mordaza para rectificadora. / Vices for grinding machine.

Fabricada en acero de cementación F155 a 60HRC. / Manufacturing in hardende steel F155 at 60HRC.


Husillo trapezoidal que facilita el apriete. / Trapezoidal spindle that improves the clamping.

Tolerancia general incluso paralelismo y perpendicular de $\pm 0,03\text{mm}$. / General tolerance in parallelism and perpendicularity of $\pm 0,03\text{ mm}$.

Se puede apoyar lateralmente para escuadrar. / It can be laterally positioned to assist with squaring.

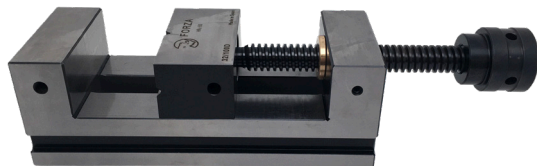

Medidas y despiece / Measures and spare part

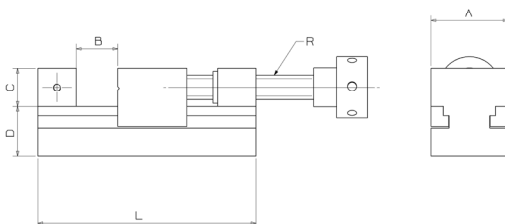

Ref .	A	B	C Altura boca	D	L (Longitud)	M	R	Peso
32/60D	60	55	25	25	110	15	TR14X3	2,4
32/80D	80	100	40	44	220	34	TR22X5	6,5
32/100D	100	125	45	45	260	38,5	TR22X5	13,0
32/125D	125	160	50	50	300	40	TR26X5	19,5
32/150D	150	175	50	50	315	40	TR26X5	23,8



1- Mantenga las normas de higiene y seguridad en el trabajo.
/ Keep the standards of hygiene and safety at work.

2- Utilice los elementos de protección individual obligatorios.
/ Always wear suitable personal protective equipment.

Despiece / Spare parts

