


CODE NO.	THREAD	GRIP RANGE	DRILL	d	D	K	L	I	C	S	GROV	SERR.	Lf	TENSILE(KN)	TORQUE (Nm)
TR04165LFKNI2-C	M4-P0,7	0,5-3,0	Ø6,0	Ø5,9	Ø8,5	1,00	16,50	4,80	6,50	5,64	24T	30T	11,30	6,80	3,00
TR05190LFKNI2-C	M5-P0,8	0,5-3,0	Ø7,0	Ø6,9	Ø9,5	1,00	19,00	5,70	6,50	6,64	24T	36T	11,50	10,00	6,00
TR06220LFKNI2-C	M6-P1,0	0,5-3,0	Ø9,0	Ø8,9	Ø12,5	1,50	22,00	7,60	7,20	8,64	30T	36T	12,70	15,00	10,00
TR08265LFKNI2-C	M8-P1,25	0,5-3,0	Ø11,0	Ø10,9	Ø15,5	1,50	26,50	9,50	7,70	10,64	36T	36T	14,80	27,00	24,00
TR10370LFKNI2-C	M10-P1,5	1,0-3,5	Ø13,0	Ø12,9	Ø18,5	2,00	37,00	11,20	9,50	12,61	40T	36T	19,20	37,00	48,00

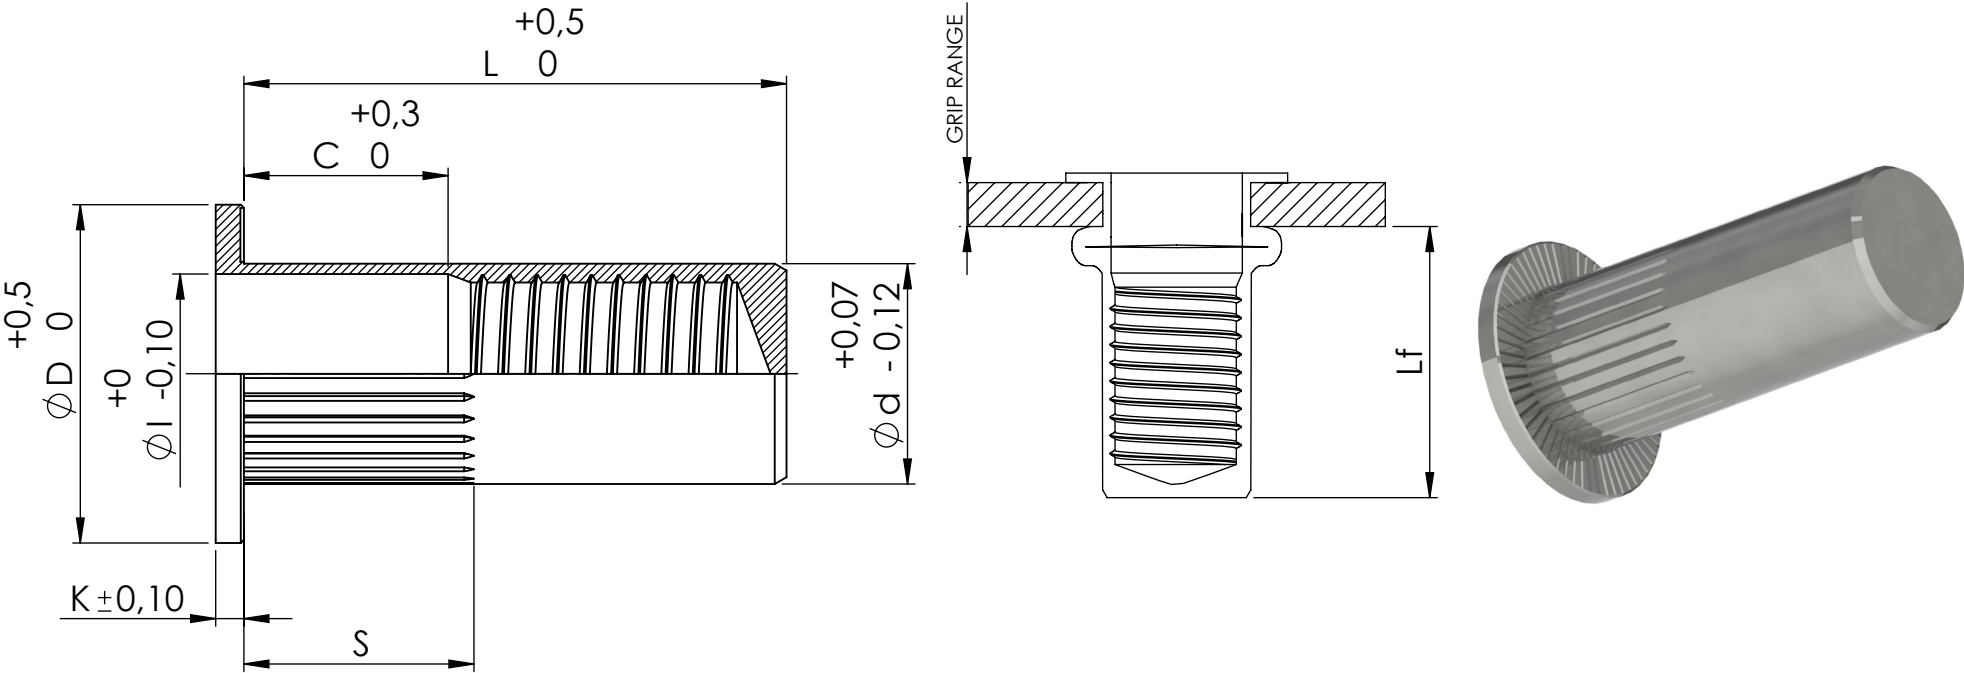

Este plano es propiedad de Remaches Tudela S.L. todos los derechos reservados/ This drawing is the property of Remaches Tudela S.L. all rights reserved				
DIBUJADO / DRAWN BY FECHA / DATE	J.SANZ 15/11/2021	DENOMINACIÓN DESCRIPTION	TUERCA REM. INOX A2 C.ANCHA RAN.CERRADA / RIVET NUT FLAT HEAD KNURLED S.STEEL A2 BODY CLOSED-END	
REVISIÓN / REVISION FECHA / DATE	Rev. 0 15/11/2021	MATERIAL MATERIAL	INOX A2 / STAINLESS STEEL A2	
		ACABADO FINISHED	PASIVADO / BRIGHT	
		REFERENCIA REFERENCE	LFKNI2-C	
			ESPECIFICACIONES GENERALES GENERAL SPECIFICATIONS	
			TOLERANCIAS TOLERANCES	Según plano/ According drawing
			UNIDADES UNITS	mm
				A4