

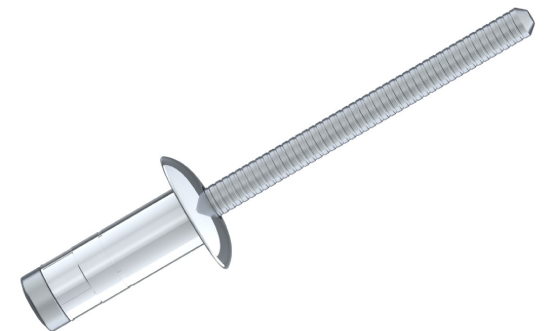


d(mm)	Part No.	L(mm)	Grip Range(mm)		Drill Size (mm)	D(mm)	S(mm)	dm(mm)	P(mm)	Tracción Tensile (N)	Cizalla Shear (N)
			Min	Max							
d=6,4	R0556490	9	1,5	3,5	6,5	12,8	2,9	4,17	32	6500	9000
	R05564105	10,5	2,8	4,8							
	R05564125	12,5	4,8	6,8							
	R05564145	14,5	6,8	8,8							
	R05564165	16,5	8,8	10,8							
	R05564185	18,5	10,8	12,8							
	R05564205	20,5	12,8	14,8							
	R05564225	22,5	14,8	16,8							
	R05564245	24,5	16,8	18,8							
	R05564265	26,5	18,8	20,8							
	R05564285	28,5	20,8	22,8							
	R05564305	30,5	22,8	24,8							

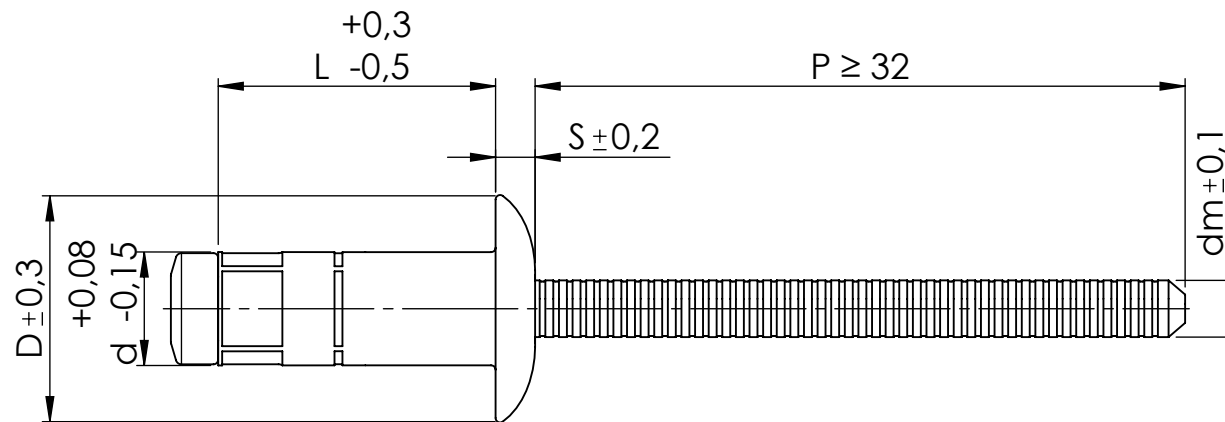

Este plano es propiedad de Remaches Tudela S.L. todos los derechos reservados/ This drawing is the property of Remaches Tudela S.L. all rights reserved					
DIBUJADO / DRAWN BY FECHA / DATE	J.SANZ 15/11/2021	DENOMINACIÓN DESCRIPTION	REMACHE CABEZA ALOMADA H-LOCK / DOME HEAD H-LOCK RIVET	ESPECIFICACIONES GENERALES GENERAL SPECIFICATIONS	
REVISIÓN / REVISION FECHA / DATE	Rev. 0 15/11/2021	CUERPO / BODY	CLAVO / MANDREL	TOLERANCIAS TOLERANCES	Según plano/ According drawing
		MATERIAL	ACERO STEEL	UNIDADES UNITS	mm
		ACABADO FINISHED	CINCADO ZINC PLATED	REFERENCIA REFERENCE	R05564
				⊕	A4