



d(mm)	Part No.	L(mm)	Grip Range (mm)		Drill Size (mm)	D(mm)	dm(mm)	P(mm)	Tracción Tensile (N)	Cizalla Shear (N)
			Min	Max						
d=3,2	RL093206	6	2,0	3,5	3,3	6,0	1,75	26	980	760
	RL093208	8	3,5	5,0						
	RL093210	10	5,0	7,0						
	RL093212	12	7,0	9,0						
	RL093214	14	9,0	11,0						
	RL093216	16	11,0	13,0						
	RL093218	18	13,0	15,0						

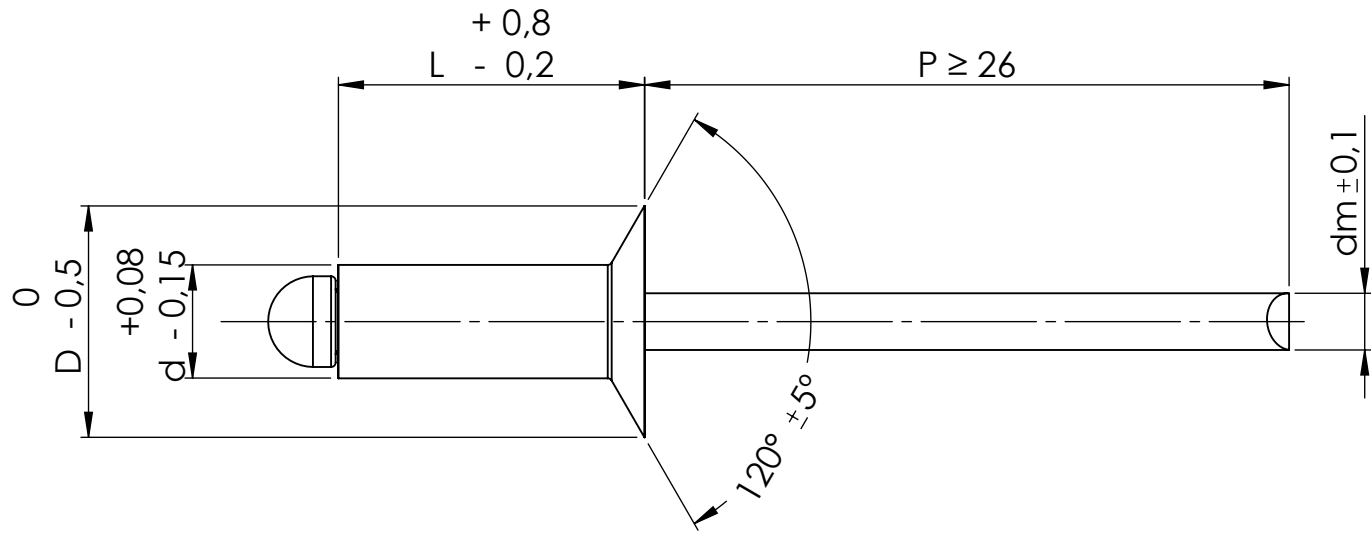

Este plano es propiedad de Remaches Tudela S.L. todos los derechos reservados/ This drawing is the property of Remaches Tudela S.L. all rights reserved					
DIBUJADO / DRAWN BY FECHA / DATE	J.SANZ 15/11/2021	DENOMINACIÓN / DESCRIPTION REMACHE CABEZA AVELLANADA LACADO ESTÁNDAR/ COUNTERSUNK HEAD PAINTED STANDARD RIVET		ESPECIFICACIONES GENERALES GENERAL SPECIFICATIONS	
REVISIÓN / REVISION FECHA / DATE	Rev. 0 15/11/2021	CUERPO / BODY	CLAVO / MANDREL	TOLERANCIAS / TOLERANCES	Según plano/ According drawing
REMACHES TUDELA		MATERIAL	ALUMINIO 3.5% MG ALUMINUM 3.5% MG	ACERO STEEL	UNIDADES / UNITS
		ACABADO / FINISHED	LACADO PAINTED	CINCADO ZINC PLATED	mm
REFERENCIA / REFERENCE	RL0932			A4	