


CODE NO.	THREAD	GRIP RANGE	DRILL	d	D	K	L	I	C	Lf	TENSILE(KN)	TORQUE (Nm)
TR04160TSOHS-C	M4-P0,7	0,5-3,0	H6,1	H5,9	H7,0	0,60	16,00	4,90	5,20	12,30	6,80	3,00
TR05200TSOHS-C	M5-P0,8	0,5-3,0	H7,1	H6,9	H8,0	0,60	20,00	5,90	6,20	14,00	10,00	6,00
TR06205TSOHS-C	M6-P1,0	0,5-3,0	H9,1	H8,9	H10,0	0,70	20,50	7,90	6,70	14,80	15,00	10,00
TR08230TSOHS-C	M8-P1,25	0,5-3,0	H11,1	H10,9	H12,0	0,70	23,00	9,90	7,20	15,50	27,00	24,00
TR10285TSOHS-C	M10-P1,5	1,0-4,0	H13,1	H12,9	H14,0	0,80	28,50	11,90	9,00	20,00	37,00	48,00

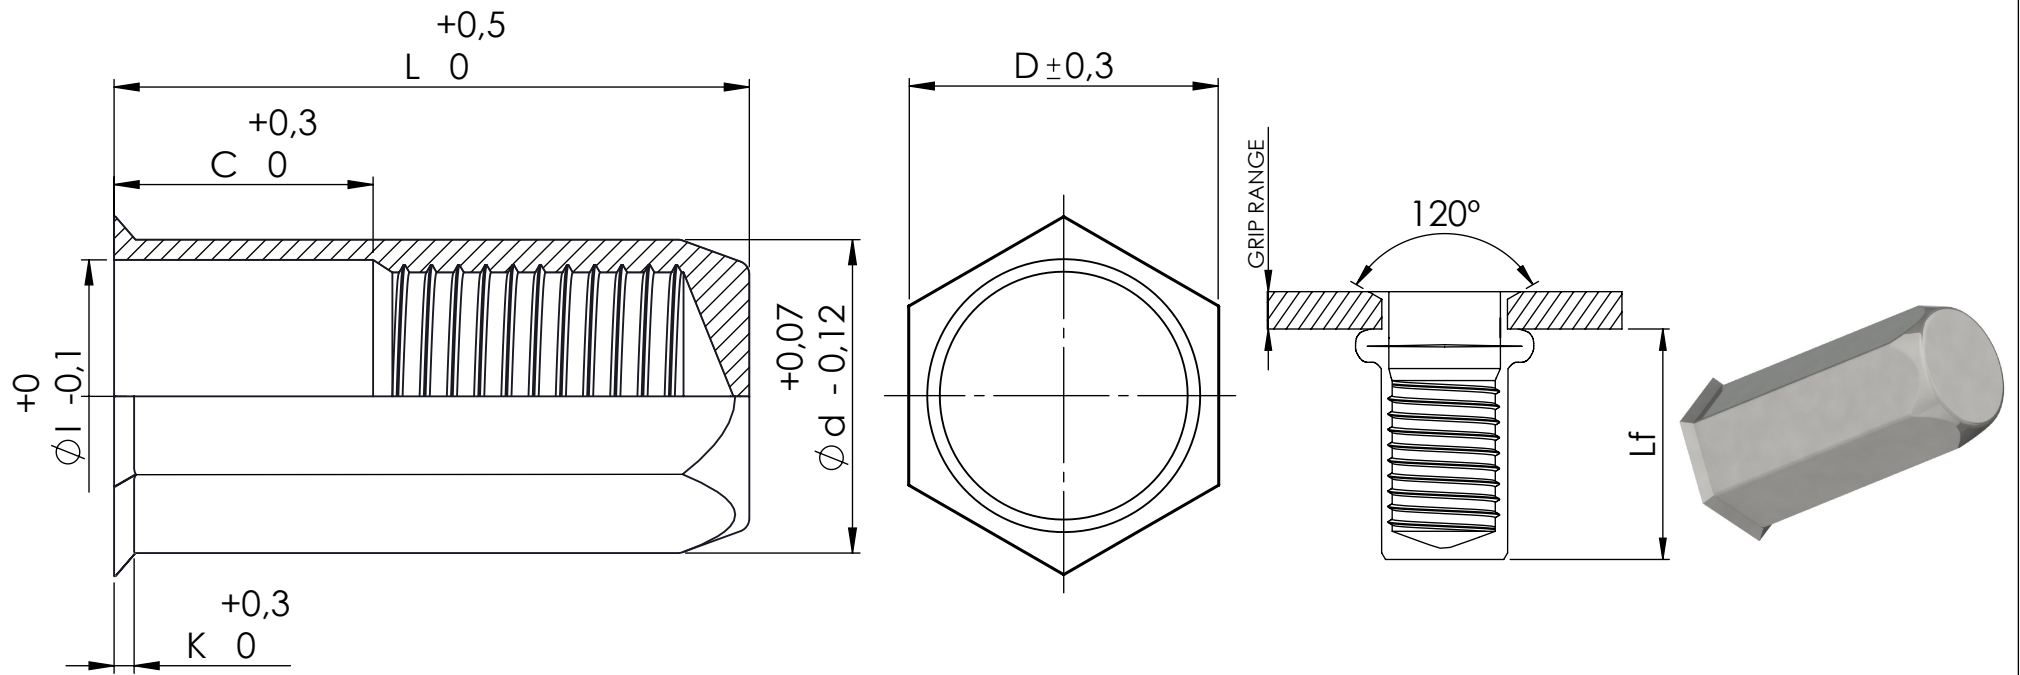

Este plano es propiedad de Remaches Tudela S.L. todos los derechos reservados/ This drawing is the property of Remaches Tudela S.L. all rights reserved				
DIBUJADO / DRAWN BY FECHA / DATE	J.SANZ 15/11/2021	DENOMINACIÓN DESCRIPTION	TUERCA REM. ACERO C.REDUCIDA HEXAGONAL CERRADA / RIVET NUT REDUCED HEAD STEEL BODY HEX. CLOSED-END	
REVISIÓN / REVISION FECHA / DATE	Rev. 0 15/11/2021	MATERIAL MATERIAL	ACERO 1008 / STEEL 1008	
REMACHES TUDELA		ACABADO FINISHED	CINCADO / ZINC PLATED	
		REFERENCIA REFERENCE	TSOHS-C	
			ESPECIFICACIONES GENERALES GENERAL SPECIFICATIONS	
			TOLERANCIAS TOLERANCES	Según plano/ According drawing
			UNIDADES UNITS	mm
				A4