

Operator name and signature: RU _____

Output:	758 lm
Peak:	297 cd
Lux@50cm:	1189 Lux
Power:	8,7 W
Power Factor / DF	0,5
Standby power	0,35 W


According to regulation (EU) 2019/2015

Directionality:	Directional
Useful Lumen:	673 lm
η_{TM} - Efficacy	91 lm/W
Energy Class:	F

Light efficacy:
87 Lumen/Watt

Light quality:
CRI: 81,8

Color temperature:
5791 K

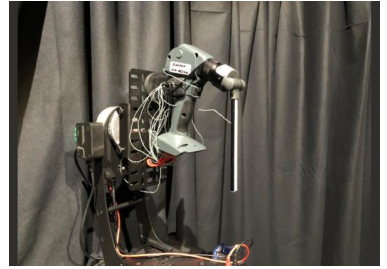



Product name:
Multilight T1 Handle and Slim

Item number:
03.5693C

Date and time:
30-06-2022 09:26:07

Description:
Standby Power: 0,35W
Sensor distance: 250cm
Warmup: <2% in 15 minutes
Power Supply: CAS PSU


Spectra

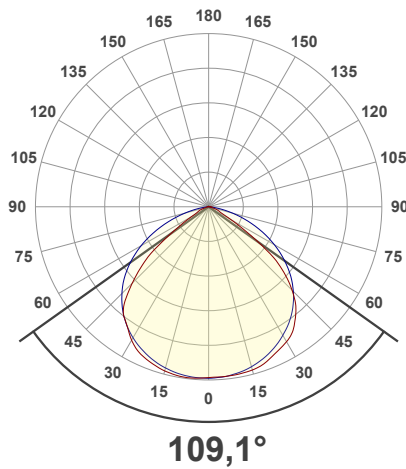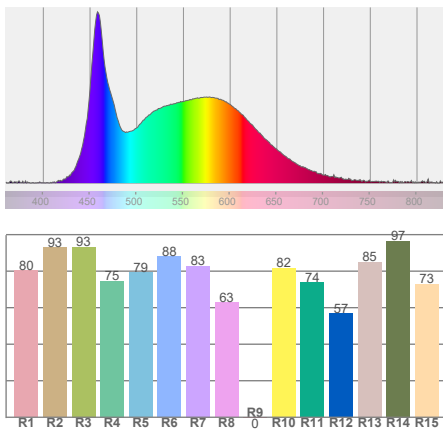

BEAM DETAILS

Beam distance: 34,3 meters

Distance (meter)	1 m	2 m	3 m	4 m	5 m
Distance (feet)	3,3 ft	6,6 ft	9,8 ft	13,1 ft	16,4 ft

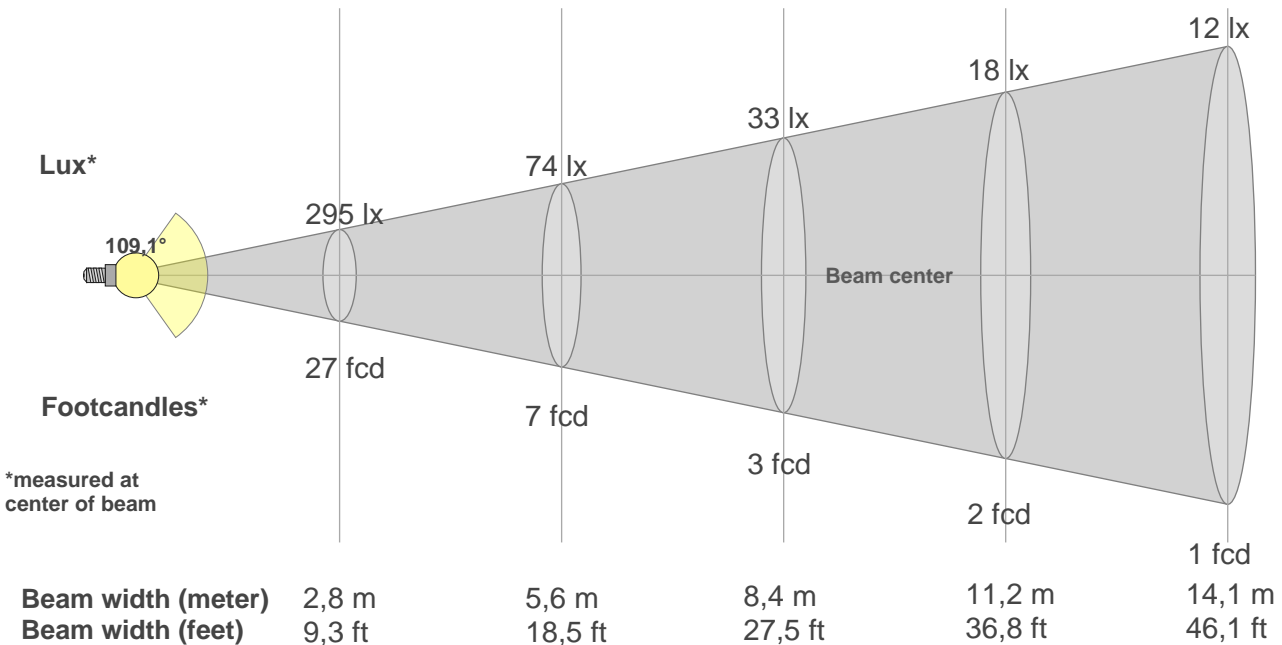

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
295lx	74lx	33lx	18lx	12lx	8lx	6lx	5lx	4lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx
27,4fcd	6,8fcd	3fcd	1,7fcd	1,1fcd	0,8fcd	0,6fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

FLICKER DETAILS


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

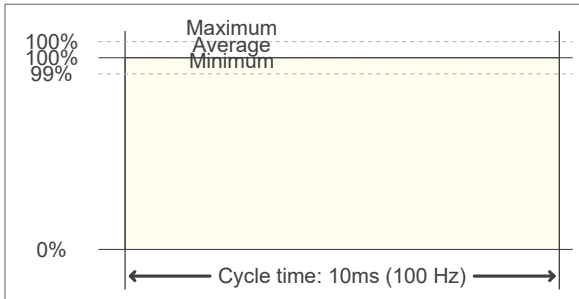


Flicker frequency:	100 Hz
Flicker index:	0
Flicker percentage:	0,07 %
SVM: (Visual flicker)	0
Pst LM:	0,05
SDCM	n/a
Rated Color Temperature	5791 K
Duv	0,0039
CIE Coordinates (x, y)	0,326, 0,349
CIE Coordinates (u, v)	0,199, 0,320

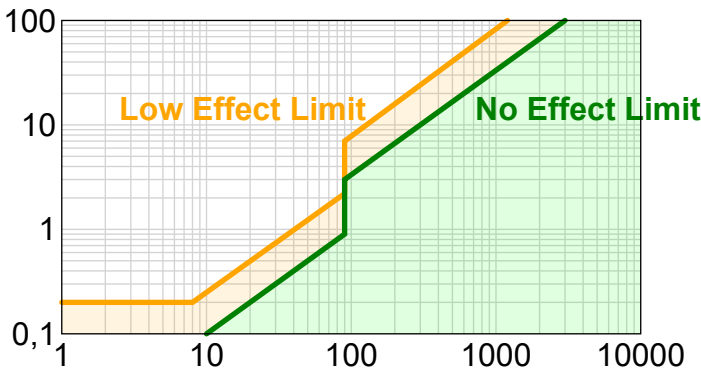


Flicker IEEE 1789

WARMUP DETAILS according to EN 13032-1

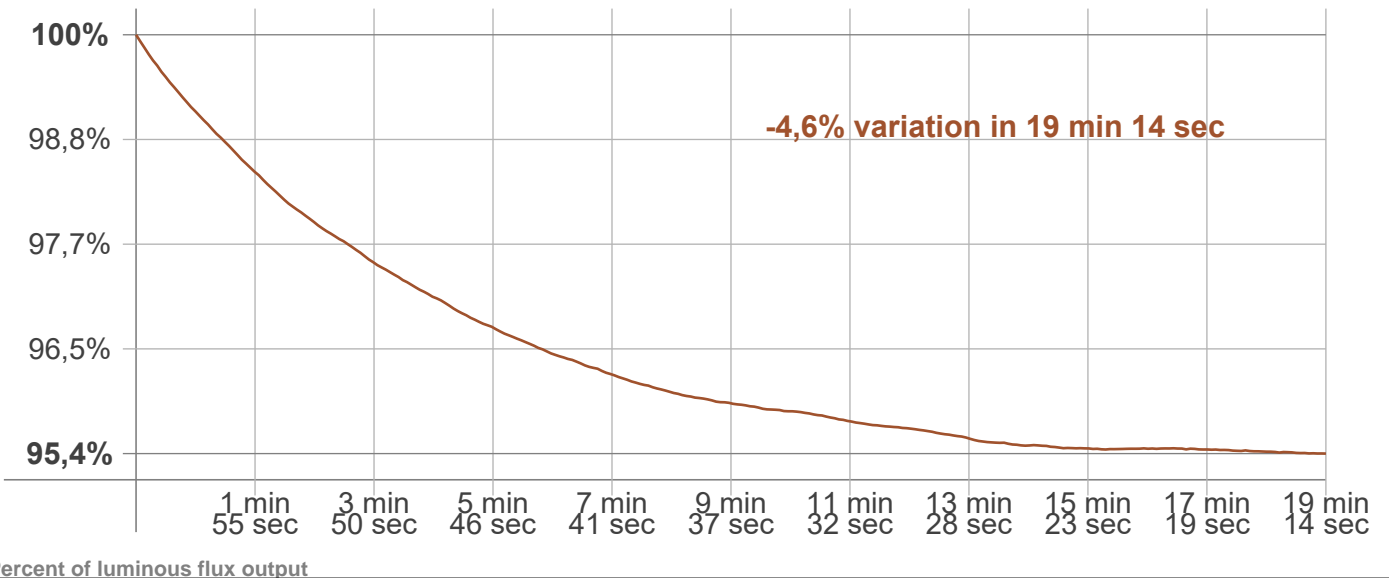

Temperatures

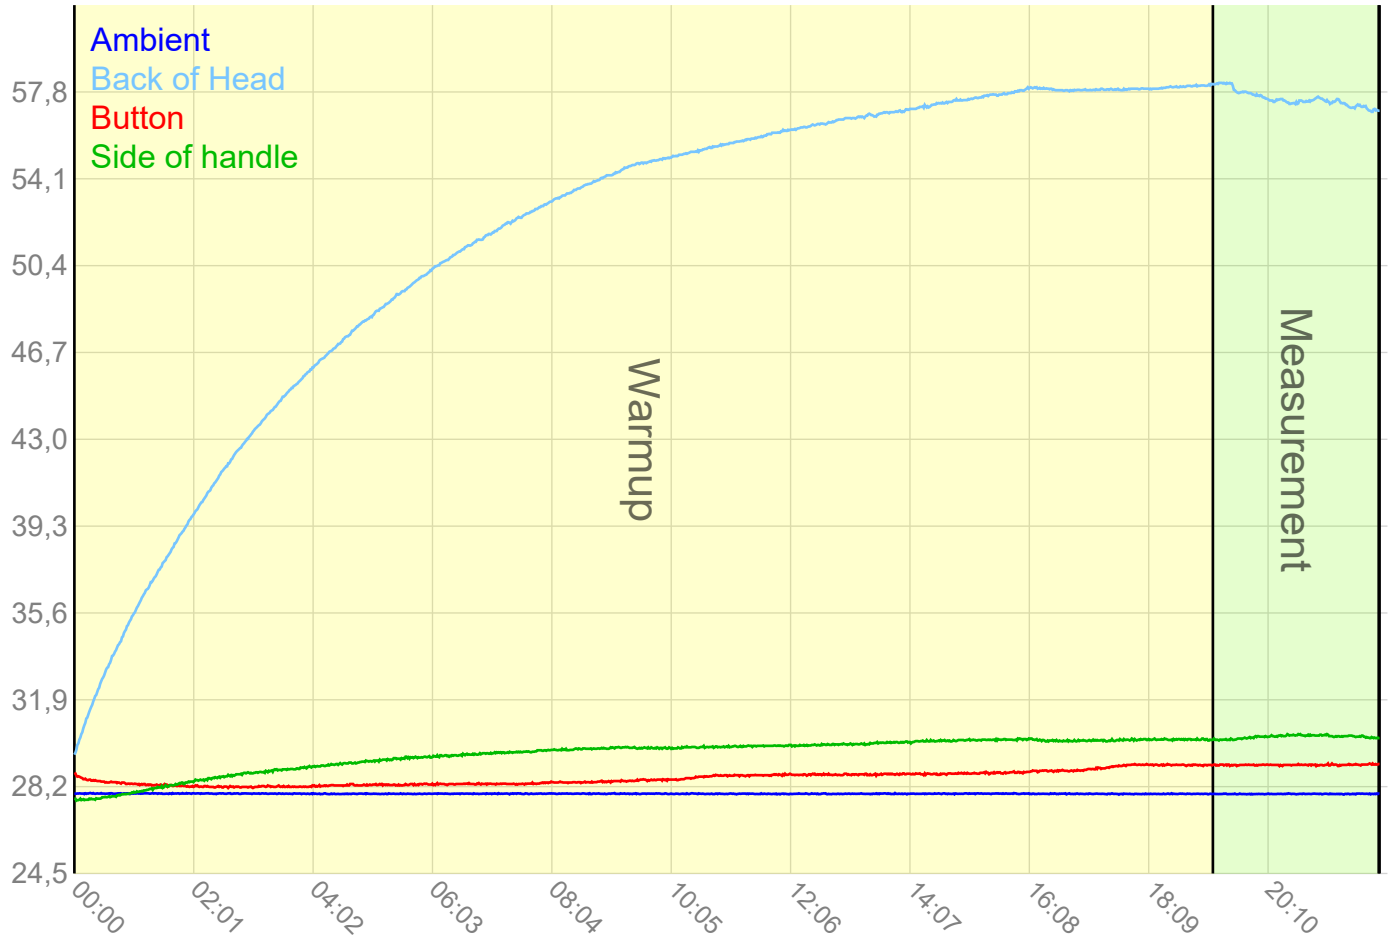

Channel	Temperature [°C]
Ambient temperature average	27,90
Back of Head Max	58,19
Button Max	29,19
Side of handle Max	30,44

Channel	Δt	t@40°C
Back of Head	30,29	70,29
Button	1,29	41,29
Side of handle	2,54	42,54