

Operator name and signature: RU Rolf Ugilt

Output:	5177 lm
Peak:	2266 cd
Lux@50cm:	9063 Lux
Power:	44,8 W
Power Factor / DF ϕ 1:	1,0
Standby power	0,00 W

Light efficacy:

115 Lumen/Watt

Light quality:

CRI: 84,1

Color temperature:

6875 K



According to regulation (EU) 2019/2015

Directionality:	Directional
Useful Lumen:	4783 lm
η TM - Efficacy	125 lm/W
Energy Class:	E

Product name:
03.6105C_MAINS_VOLTAGE_LUMINAIRE_STANDARD_REPORT_2022_06_28

Item number:

03.6105C

Date and time:

15-03-2021 14:05:30



Description:

Standby Power: 0W

Sensor distance: 350 cm.


Warmup: <2% in 15 minutes
Power Supply: CAS PSU

Spectra

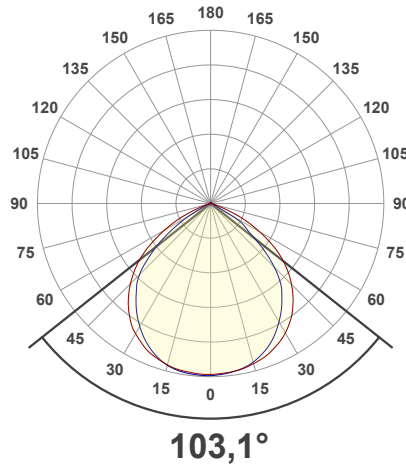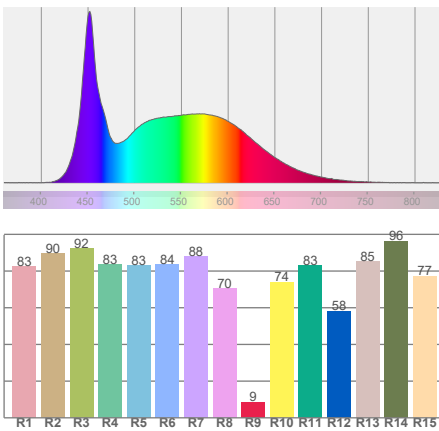

BEAM DETAILS

Beam distance: 94,9 meters

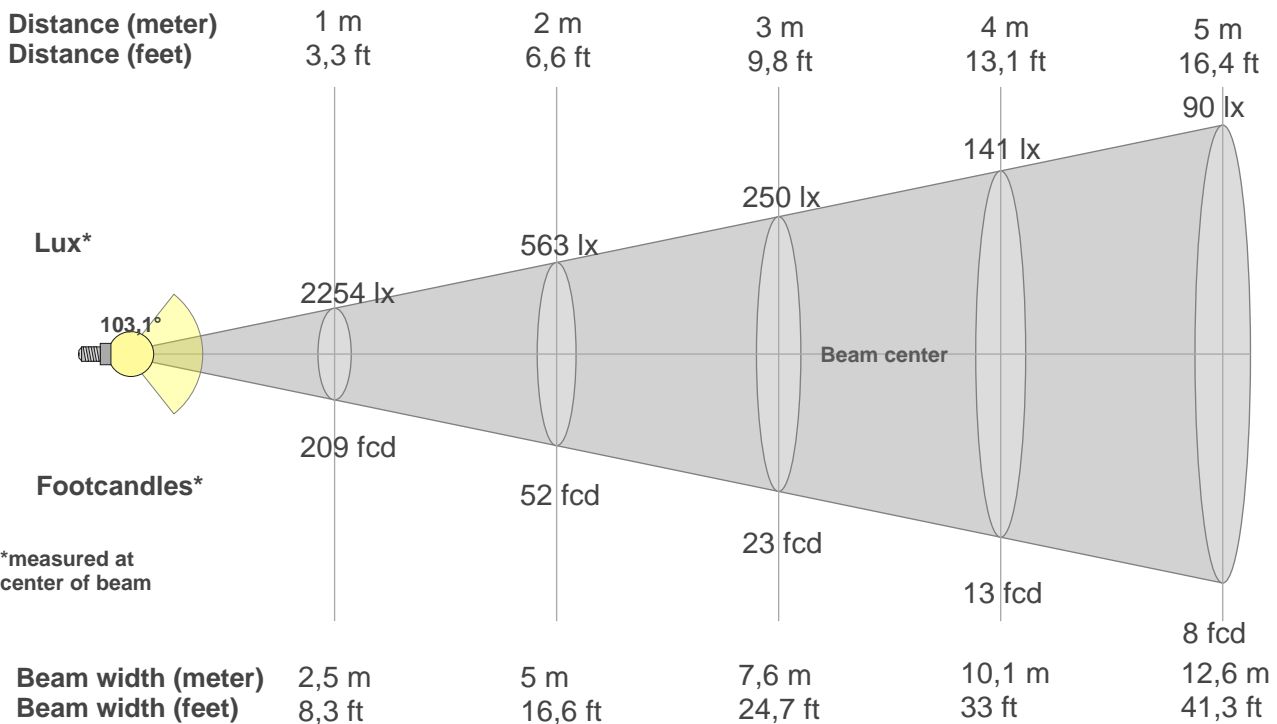

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
2254lx	563lx	250lx	141lx	90lx	63lx	46lx	35lx	28lx	23lx	19lx	16lx	13lx	11lx	10lx	9lx	8lx	7lx	6lx	6lx
209,4fc	52,3fcd	23,3fcd	13,1fcd	8,4fcd	5,8fcd	4,3fcd	3,3fcd	2,6fcd	2,1fcd	1,7fcd	1,5fcd	1,2fcd	1,1fcd	0,9fcd	0,8fcd	0,7fcd	0,6fcd	0,6fcd	0,5fcd

FLICKER DETAILS

Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

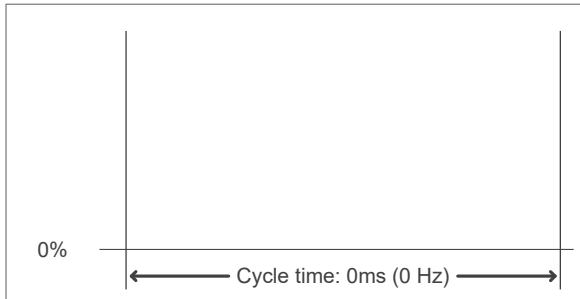

Flicker frequency:	n/a Hz
Flicker index:	n/a
Flicker percentage:	n/a %
SVM: (Visual flicker)	n/a
Pst LM:	n/a
SDCM	n/a
Rated Color Temperature	6875 K
Duv	0,0007
CIE Coordinates (x, y)	0,307, 0,322
CIE Coordinates (u, v)	0,197, 0,309

WARMUP DETAILS according to EN 13032-1

