


Operator name and signature: RU Rolf Ugilt

Output:	1073 lm
Peak:	413 cd
Lux@50cm:	1653 Lux
Power:	11,3 W
Power Factor / DF	0,5
Standby power	0,35 W

Light efficacy:
95 Lumen/Watt

Light quality:
CRI: 84,7



Color temperature:
6904 K

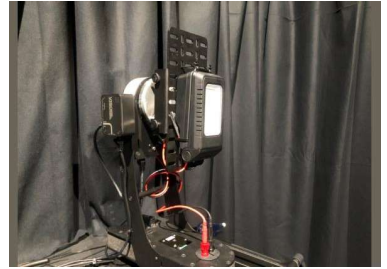

According to regulation (EU) 2019/2015

Directionality:	Directional
Useful Lumen:	928 lm
η _{TM} - Efficacy	97 lm/W
Energy Class:	F

Spectra

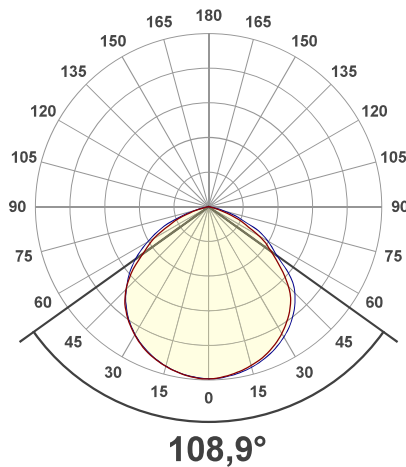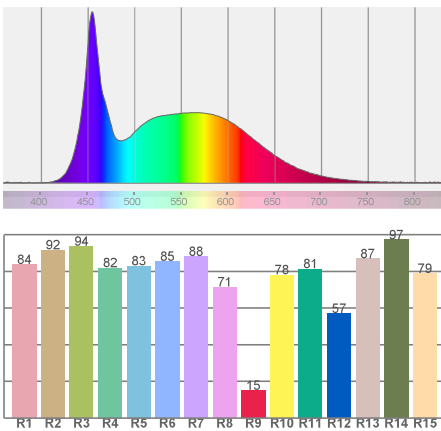

Product name:
Basic Connect

Item number:
03.6109C


Date and time:
07-09-2022 09:57:00

Description:
Standby Power: 0,35 W
Sensor distance: 150 cm
Warmup: <2% in 15 minutes
Power Supply: CAS PSU

BEAM DETAILS

Beam distance: 40,6 meters

Distance (meter)	1 m	2 m	3 m	4 m	5 m
Distance (feet)	3,3 ft	6,6 ft	9,8 ft	13,1 ft	16,4 ft

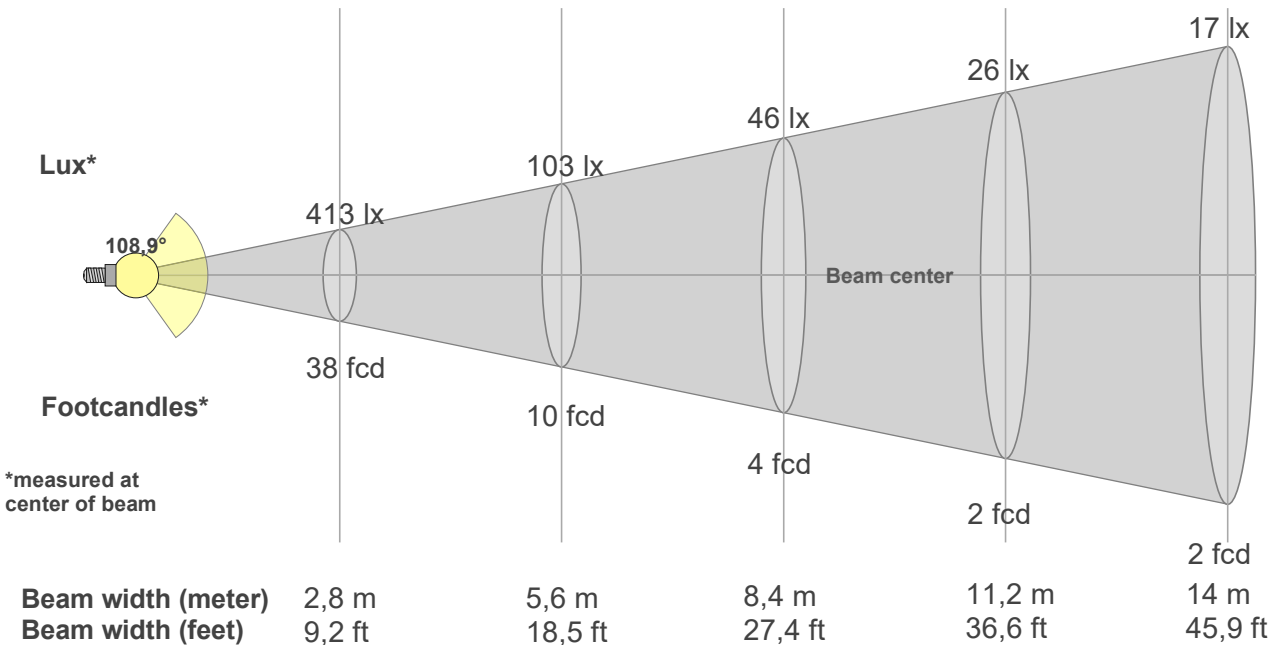

*measured at center of beam

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
413lx	103lx	46lx	26lx	17lx	11lx	8lx	6lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx
38,4fcd	9,6fcd	4,3fcd	2,4fcd	1,5fcd	1,1fcd	0,8fcd	0,6fcd	0,5fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

FLICKER DETAILS


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

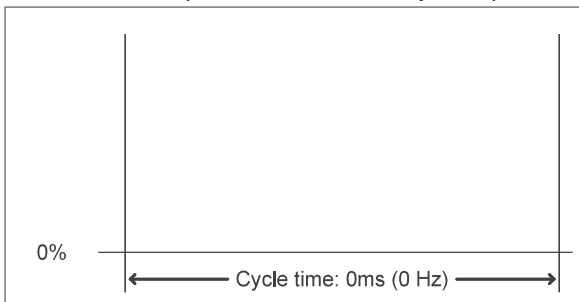


Flicker frequency:	n/a Hz
Flicker index:	n/a
Flicker percentage:	n/a %
SVM: (Visual flicker)	n/a
Pst LM:	n/a
SDCM	n/a
Rated Color Temperature	6904 K
Duv	0,0001
CIE Coordinates (x, y)	0,307, 0,323
CIE Coordinates (u, v)	0,196, 0,309

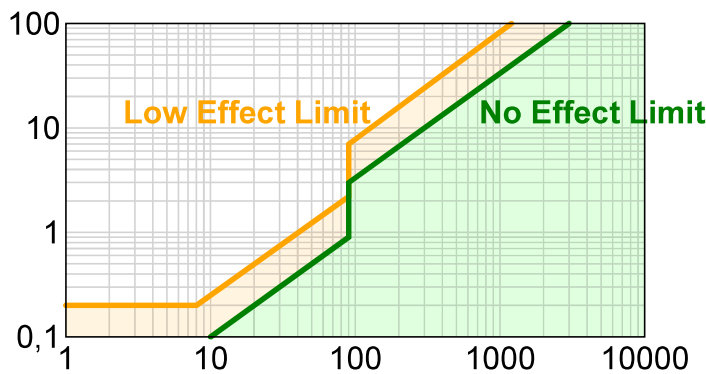

Flicker IEEE 1789

WARMUP DETAILS according to EN 13032-1

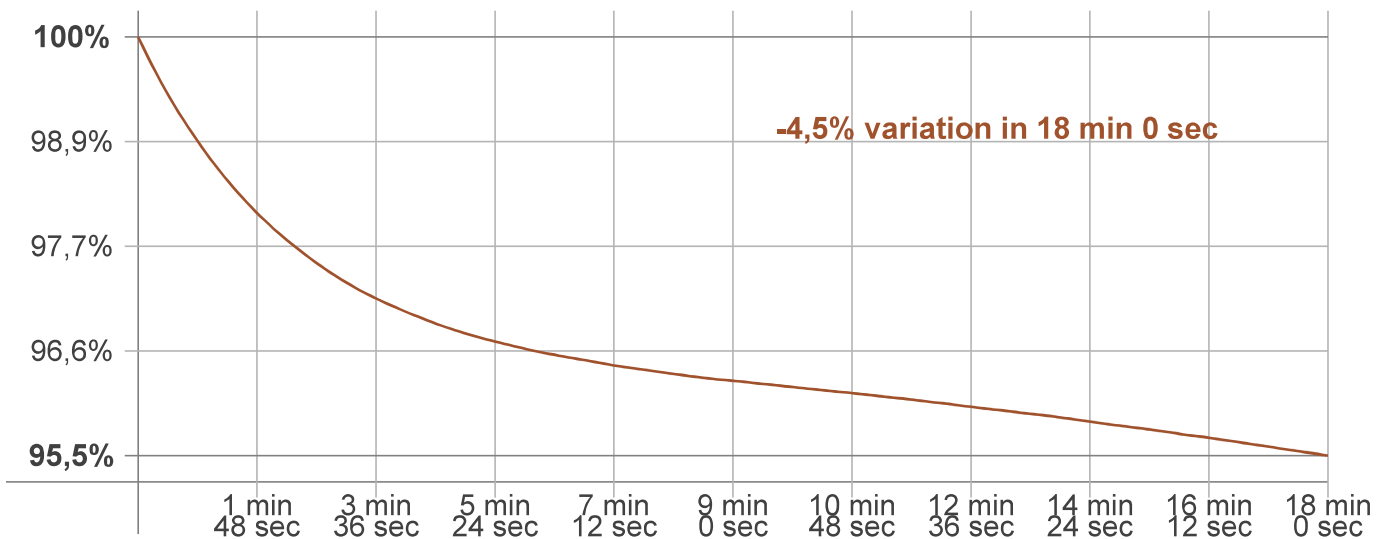

Percent of luminous flux output