

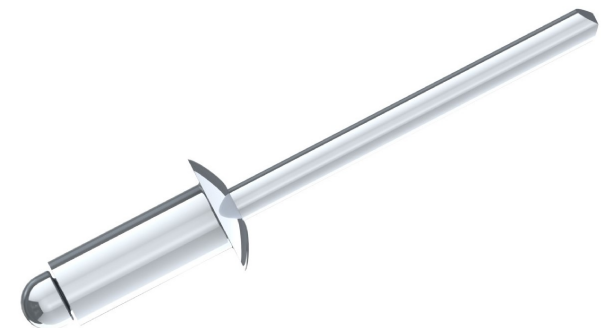


d(mm)	Part No.	L(mm)	Grip Range(mm)		Drill Size (mm)	D(mm)	S(mm)	dm(mm)	P(mm)	Tracción Tensile (N)	Cizalla Shear (N)
			Min	Max							
d=3,0	0012904	4	0,5	1,5	3,1	6,3	1,0	1,7	25	800	500
	0012906	6	1,5	3,5							
	0012908	8	3,5	5,0							
	0012910	10	5,0	7,0							
	0012912	12	7,0	9,0							
	0012914	14	9,0	11,0							
	0012916	16	11,0	13,0							
	0012918	18	13,0	15,0							
	0012920	20	15,0	17,0							
0012925	25	17,0	22,0								

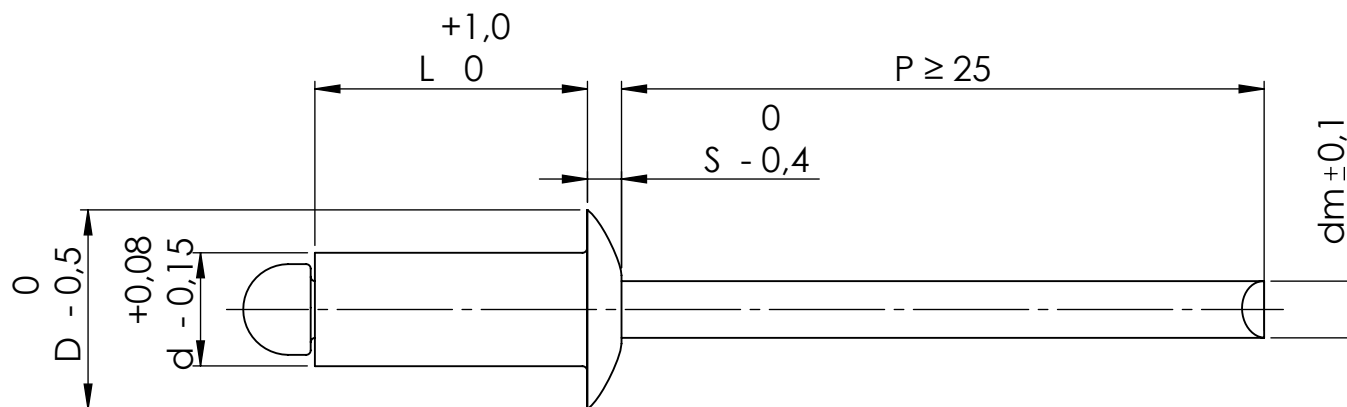

Este plano es propiedad de Remaches Tudela S.L. todos los derechos reservados/ This drawing is the property of Remaches Tudela S.L. all rights reserved												
DIBUJADO / DRAWN BY FECHA / DATE		J.SANZ 15/11/2021		DENOMINACIÓN DESCRIPTION		REMACHE CABEZA ALOMADA ESTÁNDAR/ DOME HEAD STANDARD RIVET		ESPECIFICACIONES GENERALES GENERAL SPECIFICATIONS				
REVISIÓN / REVISION FECHA / DATE		Rev. 0 15/11/2021		CUERPO / BODY		CLAVO / MANDREL		TOLERANCIAS Según plano/ TOLERANCES According drawing				
		MATERIAL		ALUMINIO 3,5% MG ALUMINUM 3,5% MG		ACERO STEEL		UNIDADES mm				
		ACABADO FINISHED		ABRILLANTADO BRIGHTNESS		CINCADO ZINC PLATED		REFERENCIA REFERENCE				
								00129				A4