



d(mm)	Part No.	L(mm)	Grip Range(mm)		Drill Size (mm)	D(mm)	S(mm)	dm(mm)	P(mm)	Tracción Tensile (N)	Cizalla Shear (N)
			Min	Max							
d=4,8	R0444808	8	-	4,0	5,1	9,5	1,4	2,65	28	1575	1185
	R0444810	10	-	6,0							
	R0444811	11	-	7,0							
	R0444812	12	-	8,0							
	R0444814	14	-	10,0							
	R0444816	16	-	12,0							
	R0444818	18	-	14,0							
	R0444820	20	-	16,0							
	R0444825	25	-	21,0							
R0444830	30	-	26,0								

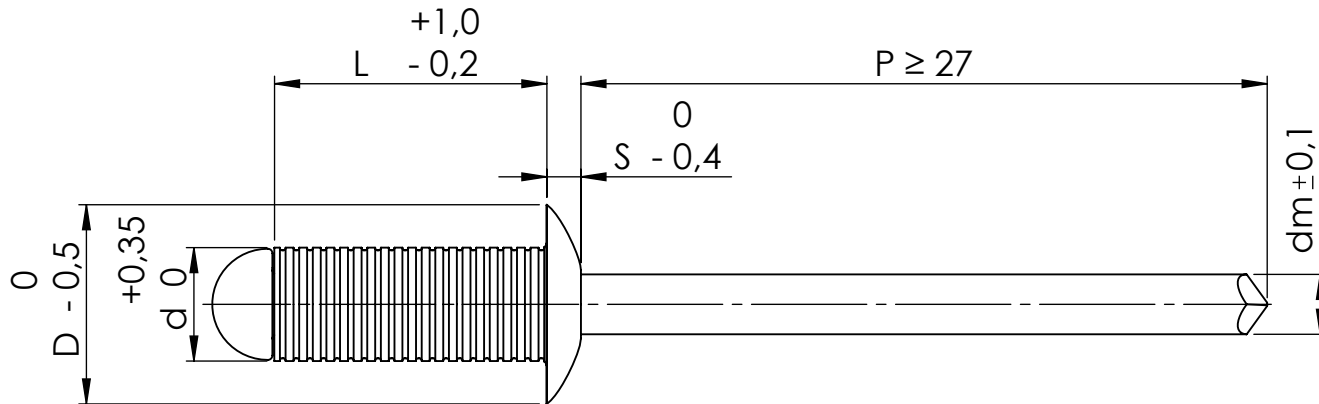

Este plano es propiedad de Remaches Tudela S.L. todos los derechos reservados/ This drawing is the property of Remaches Tudela S.L. all rights reserved											
DIBUJADO / DRAWN BY FECHA / DATE		J.SANZ 15/11/2021		DENOMINACIÓN DESCRIPTION		REMACHE CABEZA ALOMADA RANURADO/ DOME HEAD GROOVED RIVET		ESPECIFICACIONES GENERALES GENERAL SPECIFICATIONS			
REVISIÓN / REVISION FECHA / DATE		Rev. 0 15/11/2021		CUERPO / BODY		CLAVO / MANDREL		TOLERANCIAS Según plano/ TOLERANCES According drawing			
		MATERIAL		ALUMINIO 2,5% MG ALUMINUM 2,5% MG		ACERO STEEL		UNIDADES mm			
		ACABADO FINISHED		ABRILLANTADO BRIGHTNESS		CINCADO ZINC PLATED		REFERENCIA REFERENCE			
						R04448					
								A4			