

REMACHADORA DE BATERIA






# IERO 5.0

Ø2,4mm - Ø5,0mm

Acero/ Aluminio/ A2

Steel/ Aluminium/ Stainless Steel

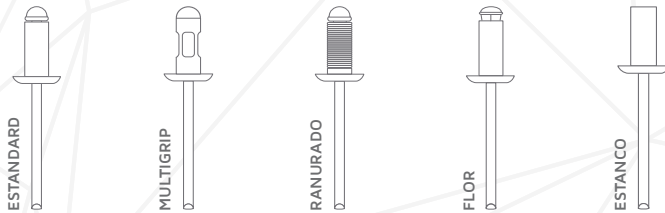

## DATOS TÉCNICOS

Remachadora para remaches	Ø2,4mm - Ø5,0mm
Carrera	21mm
Fuerza de tracción	12000N
Cargador	100-240VAC•50-60Hz•18VDC•2,5A max•0,37 kgs
Batería	5 cells • C 2.0 Ah • W 0,36 kg • 18V • Li-ion
Potencia	DC motor 18V
Materiales del remache	Acero • Aluminio • A2
Boquillas	Ø2.4 • Ø3.0/3.2 • Ø4.0 • Ø4.8/5.0
Indicadores led	Indicador de carga Batería led • 3 leds para la aplicación
Peso	2,15kgs
Colector de vástagos	Colector de vástagos transparente para control visual

## SPECIFICATIONS

Rivet tool for Rivets	Ø2,4mm - Ø5,0mm
Stroke	21mm
Traction power	12000N
Charger	100-240VAC•50-60Hz•18VDC•2,5A max•0,37 kgs
Battery	5 cells • C 2.0 Ah • W 0,36 kg • 18V • Li-ion
Power	DC motor 18V
Material	Steel • Aluminium • Stainless Steel
Nose pieces	Ø2.4 • Ø3.0/3.2 • Ø4.0 • Ø4.8/5.0
Light indicators	Battery light indicator • 3 led lights for application
Tool weight	2,15kgs
Nail collector	Transparent collector for visual control