



d(mm)	Part No.	L(mm)	Grip Range (mm)		Drill Size (mm)	D(mm)	dm(mm)	P(mm)	Tracción Tensile (N)	Cizalla Shear (N)
			Min	Max						
d=3,2	R0093206	6	2,0	3,5	3,3	6,0	1,75	26	980	760
	R0093208	8	3,5	5,0						
	R0093210	10	5,0	7,0						
	R0093212	12	7,0	9,0						
	R0093214	14	9,0	11,0						
	R0093216	16	11,0	13,0						
	R0093218	18	13,0	15,0						

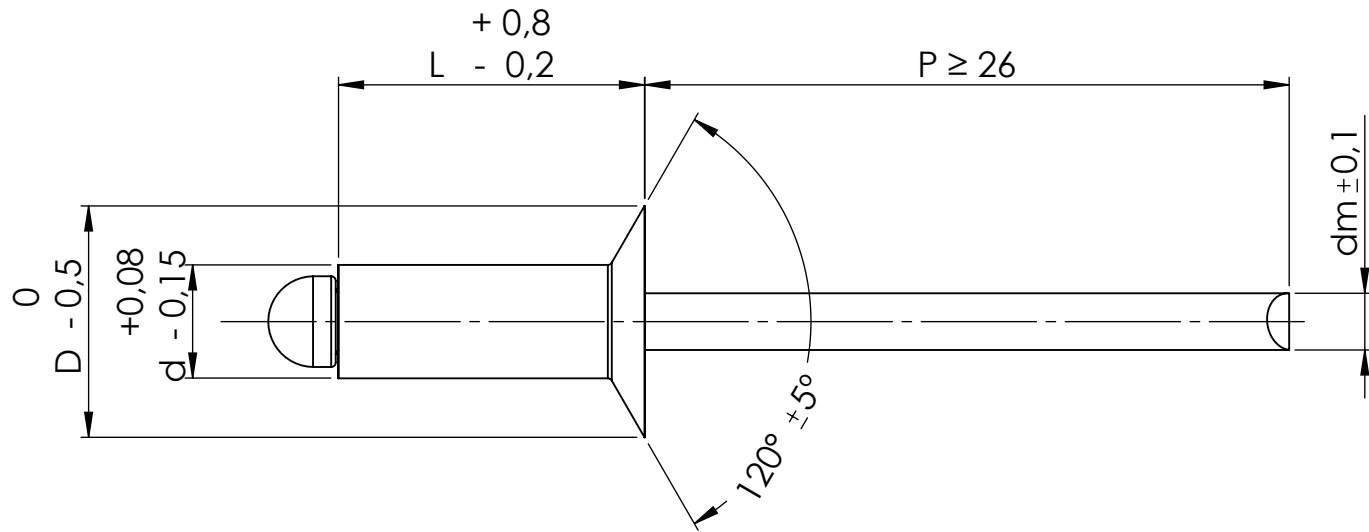

Este plano es propiedad de Remaches Tudela S.L. todos los derechos reservados/ This drawing is the property of Remaches Tudela S.L. all rights reserved									
DIBUJADO / DRAWN BY FECHA / DATE		J.SANZ 15/11/2021		DENOMINACIÓN DESCRIPTION		REMACHE CABEZA AVELLANADA ESTÁNDAR/ COUNTERSUNK HEAD STANDARD RIVET		ESPECIFICACIONES GENERALES GENERAL SPECIFICATIONS	
REVISIÓN / REVISION FECHA / DATE		Rev. 0 15/11/2021		CUERPO / BODY		CLAVO / MANDREL		TOLERANCIAS Según plano/ TOLERANCES According drawing	
REMACHES TUDELA		MATERIAL		ALUMINIO 3,5% MG ALUMINUM 3,5% MG		ACERO STEEL		UNIDADES mm	
		ACABADO FINISHED		ABRILLANTADO BRIGHTNESS		CINCADO ZINC PLATED			
REFERENCIA REFERENCE				R00932				A4	