



d(mm)	Part No.	L(mm)	Grip Range (mm)		Drill Size (mm)	D(mm)	dm(mm)	P(mm)	Tracción Tensile (N)	Cizalla Shear (N)
			Min	Max		Max	Max	Min		
d=4,0	R0093806	6	2,0	3,0	4,1	7,5	2,15	27	1600	1200
	R0093808	8	3,0	5,0						
	R0093810	10	5,0	6,5						
	R0093812	12	6,5	8,5						
	R0093814	14	8,5	10,5						
	R0093816	16	10,5	12,5						
	R0093818	18	12,5	14,5						
	R0093820	20	14,5	16,5						

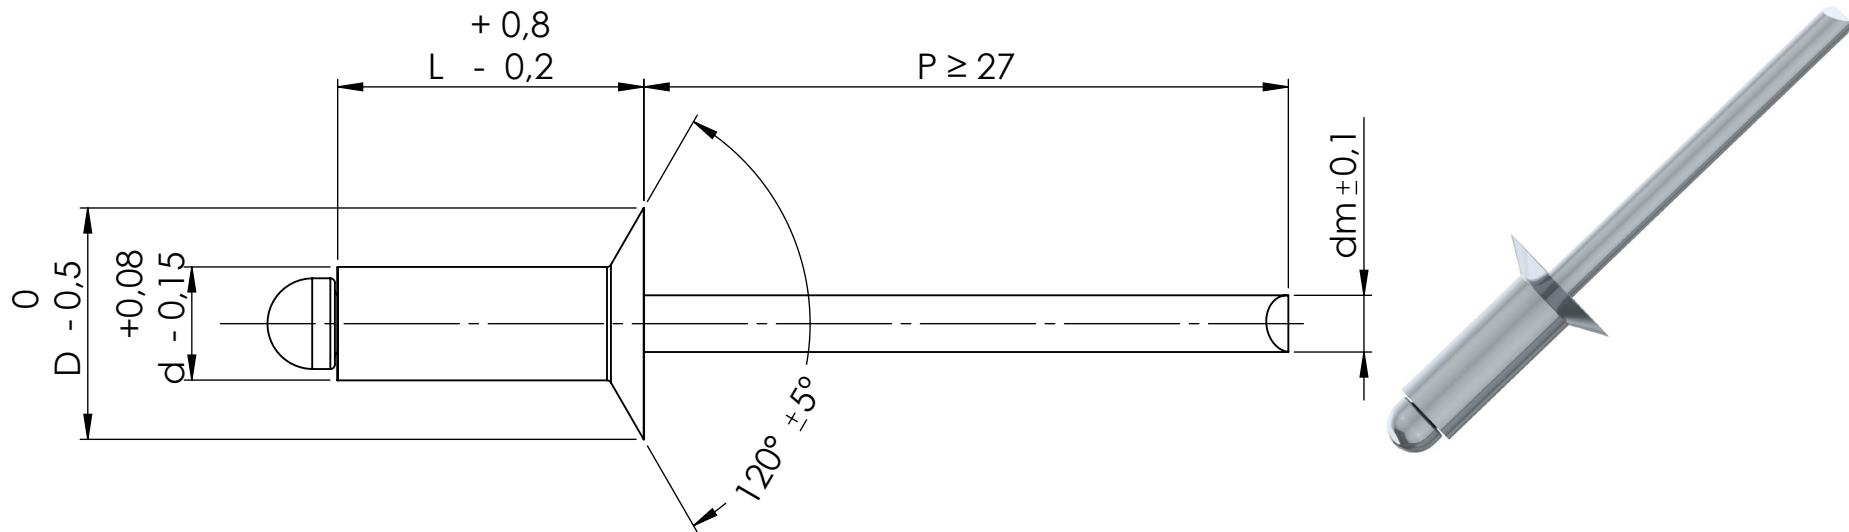

Este plano es propiedad de Remaches Tudela S.L. todos los derechos reservados/ This drawing is the property of Remaches Tudela S.L. all rights reserved									
DIBUJADO / DRAWN BY FECHA / DATE		J.SANZ 15/11/2021		DENOMINACIÓN DESCRIPTION		REMACHE CABEZA AVELLANADA ESTÁNDAR/ COUNTERSUNK HEAD STANDARD RIVET		ESPECIFICACIONES GENERALES GENERAL SPECIFICATIONS	
REVISIÓN / REVISION FECHA / DATE		Rev. 0 15/11/2021		CUERPO / BODY		CLAVO / MANDREL		TOLERANCIAS Según plano/ TOLERANCES According drawing	
REMACHES TUDELA		MATERIAL		ALUMINIO 3,5% MG ALUMINUM 3,5% MG		ACERO STEEL		UNIDADES mm	
		ACABADO FINISHED		ABRILLANTADO BRIGHTNESS		CINCADO ZINC PLATED		REFERENCIA	
				REFERENCIA		R00938		A4	