



d(mm)	Part No.	L(mm)	Grip Range(mm)		Drill Size (mm)	D(mm)	S(mm)	dm(mm)	P(mm)	Tracción Tensile (N)	Cizalla Shear (N)
			Min	Max							
d=4,0	R0163806	6	1,0	3,0	4,1	8,0	1,3	2,45	27	3500	2700
	R0163808	8	2,5	4,5							
	R0163810	10	4,5	6,5							
	R0163813	13	6,5	9,5							
	R0163816	16	9,5	12,0							

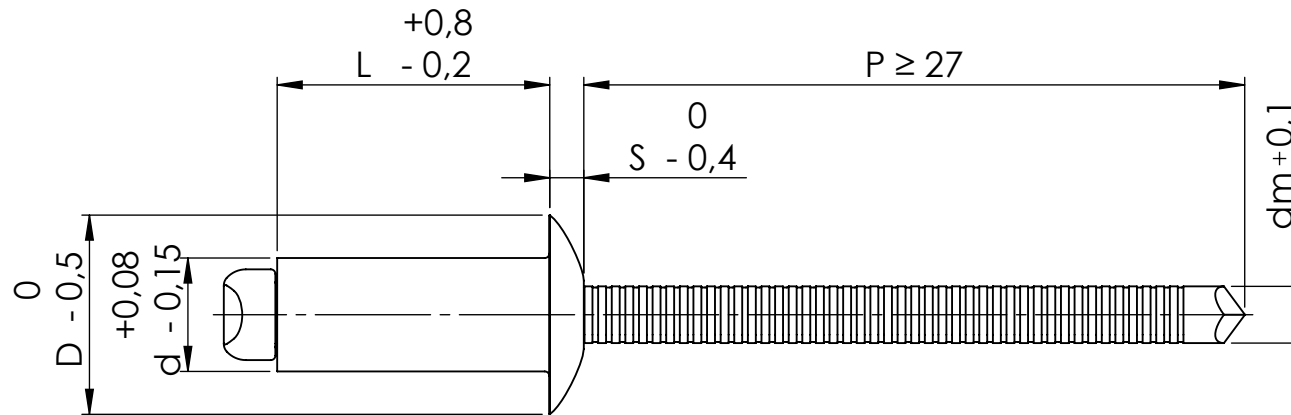

Este plano es propiedad de Remaches Tudela S.L. todos los derechos reservados/ This drawing is the property of Remaches Tudela S.L. all rights reserved											
DIBUJADO / DRAWN BY FECHA / DATE		J.SANZ 15/11/2021		DENOMINACIÓN DESCRIPTION		REMACHE CABEZA ALOMADA ESTÁNDAR/ DOME HEAD STANDARD RIVET		ESPECIFICACIONES GENERALES GENERAL SPECIFICATIONS			
REVISIÓN / REVISION FECHA / DATE		Rev. 0 15/11/2021		CUERPO / BODY		CLAVO / MANDREL		TOLERANCIAS Según plano/ TOLERANCES According drawing			
REMACHES TUDELA		MATERIAL		INOXIDABLE 316 STAINLESS STEEL 316		INOXIDABLE 316 STAINLESS STEEL 316		UNIDADES mm			
		ACABADO FINISHED		ABRILLANTADO BRIGHTNESS		ABRILLANTADO BRIGHTNESS		REFERENCIA REFERENCE			
						R01638		⊕		A4	