



d(mm)	Part No.	L(mm)	Grip Range(mm)		Drill Size (mm)	D(mm)	S(mm)	dm(mm)	P(mm)	Tracción Tensile (N)	Cizalla Shear (N)
			Min	Max		Max	Max	Max	Min		
d=4,8	R0164808	8	2,0	4,0	4,9	9,5	1,4	2,85	28	5000	4000
	R0164810	10	4,0	6,0							
	R0164812	12	6,0	8,0							
	R0164814	14	8,0	10,0							
	R0163816	16	9,0	11,0							
	R0163818	18	11,0	13,0							

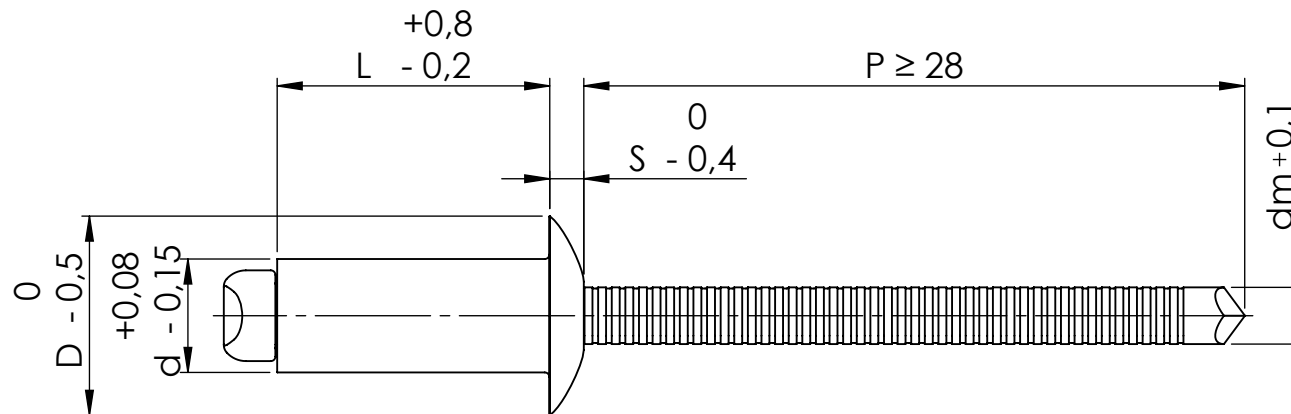

Este plano es propiedad de Remaches Tudela S.L. todos los derechos reservados/ This drawing is the property of Remaches Tudela S.L. all rights reserved											
DIBUJADO / DRAWN BY FECHA / DATE		J.SANZ 15/11/2021		DENOMINACIÓN DESCRIPTION		REMACHE CABEZA ALOMADA ESTÁNDAR/ DOME HEAD STANDARD RIVET		ESPECIFICACIONES GENERALES GENERAL SPECIFICATIONS			
REVISIÓN / REVISION FECHA / DATE		Rev. 0 15/11/2021		CUERPO / BODY		CLAVO / MANDREL		TOLERANCIAS Según plano/ TOLERANCES According drawing			
REMACHES TUDELA		MATERIAL		INOXIDABLE 316 STAINLESS STEEL 316		INOXIDABLE 316 STAINLESS STEEL 316		UNIDADES mm			
		ACABADO FINISHED		ABRILLANTADO BRIGHTNESS		ABRILLANTADO BRIGHTNESS		REFERENCIA REFERENCE			
						R01648		⊕		A4	