



d(mm)	Part No.	L(mm)	Grip Range (mm)		Drill Size (mm)	D(mm)	dm(mm)	P(mm)	Tracción Tensile (N)	Cizalla Shear (N)
			Min	Max		Max	Max	Min		
d=4,0	RL093806	6	2,0	3,0	4,1	7,5	2,15	27	1600	1200
	RL093808	8	3,0	5,0						
	RL093810	10	5,0	6,5						
	RL093812	12	6,5	8,5						
	RL093814	14	8,5	10,5						
	RL093816	16	10,5	12,5						
	RL093818	18	12,5	14,5						
	RL093820	20	14,5	16,5						

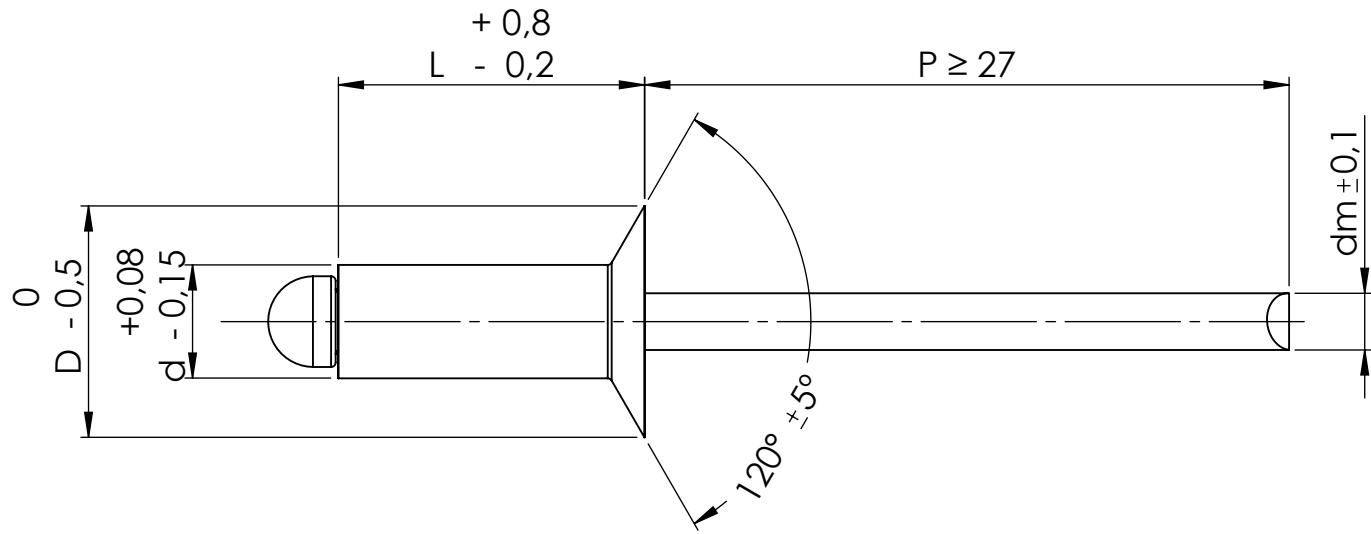

Este plano es propiedad de Remaches Tudela S.L. todos los derechos reservados/ This drawing is the property of Remaches Tudela S.L. all rights reserved									
DIBUJADO / DRAWN BY FECHA / DATE		J.SANZ 15/11/2021		DENOMINACIÓN DESCRIPCIÓN		REMACHE CABEZA AVELLANADA LACADO ESTÁNDAR/ COUNTERSUNK HEAD PAINTED STANDARD RIVET		ESPECIFICACIONES GENERALES GENERAL SPECIFICATIONS	
REVISIÓN / REVISION FECHA / DATE		Rev. 0 15/11/2021		CUERPO / BODY		CLAVO / MANDREL		TOLERANCIAS TOLERANCES	
				ALUMINIO 3,5% MG ALUMINUM 3,5% MG		ACERO STEEL		Según plano/ According drawing	
				ACABADO FINISHED		LACADO PAINTED		CINCADO ZINC PLATED	
				REFERENCIA REFERENCE		RL0938		UNIDADES UNITS	
								mm	
								A4	

**REMACHES TUDELA**